


RAPID SL FOR WALL-HUNG BIDET



D29050044.000 – 2x6 Carrier with Welded Brackets

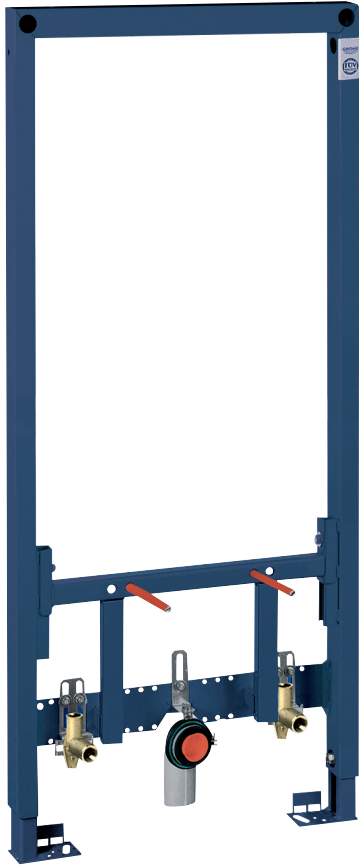

- **GROHE ToolFree** =no tools are needed to connect the main water supply, flexible hose and inspection shaft



- **GROHE QuickFix™** = concept ensures flexibility and ease of installation, cutting installation time significantly
 - For on-the-wall installations or studed walls
 - Pre-assembled
 - For single or rail installation

- Bidet mounting screws
- HT-outlet elbow (Ø 2")
- Seal (Ø 1 1/4")
- 2 x 1/2" noise protected fitting connections
- Mounting material for bidet
- Powder coated self-supporting steel frame with quick and lockable adjustments
- 44" installation height
- Accessories sold separately for-on-the-wall installation


CODES AND STANDARDS

Meets or Exceeds EPAAct92 / ASME A112.6.2 / CSA B125.3

ROUGH-IN DIAGRAM
SHOWN ON NEXT PAGE



RAPID SL FOR WALL-HUNG BIDET

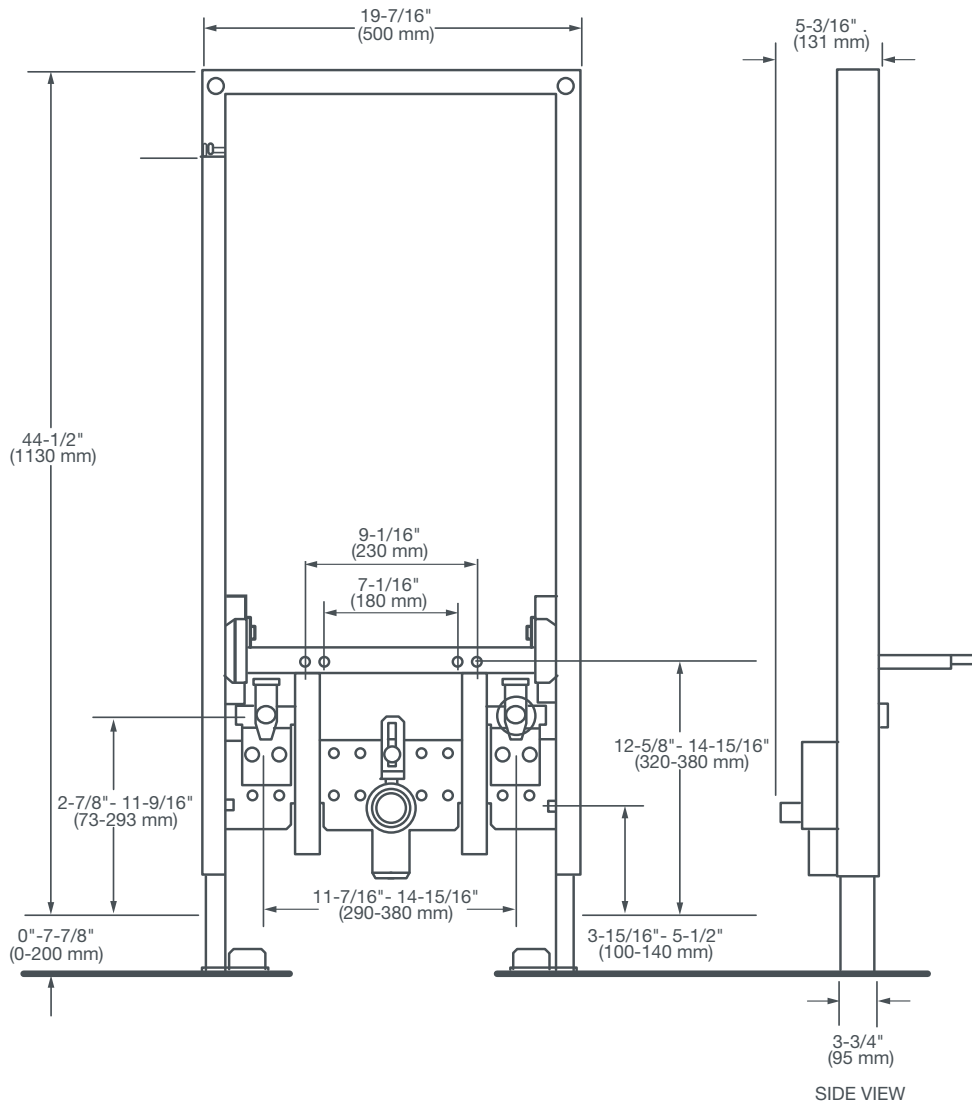

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**