



REM[®]

PRESSURE BALANCE SHOWER VALVE TRIM



- European minimalist design
- Cast brass valve with built-in check stops
- Ceramic disc valve cartridge
- Adjustable hot limit safety stop
- Pressure balance cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressures
- Concealed mounting hardware
- Maximum showerhead flow rate: 2.0 gpm (7.6 L/min)

CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/CSA B125.1/ASSE 1016

AVAILABLE FINISHES

Polished Chrome
Brushed Nickel

FINISH CODE

100
144


DESCRIPTION

Pressure Balance
Shower Trim
Shower Rough Valve
(required component)

PRODUCT NUMBER

D35100500.XXX

D35000500.191

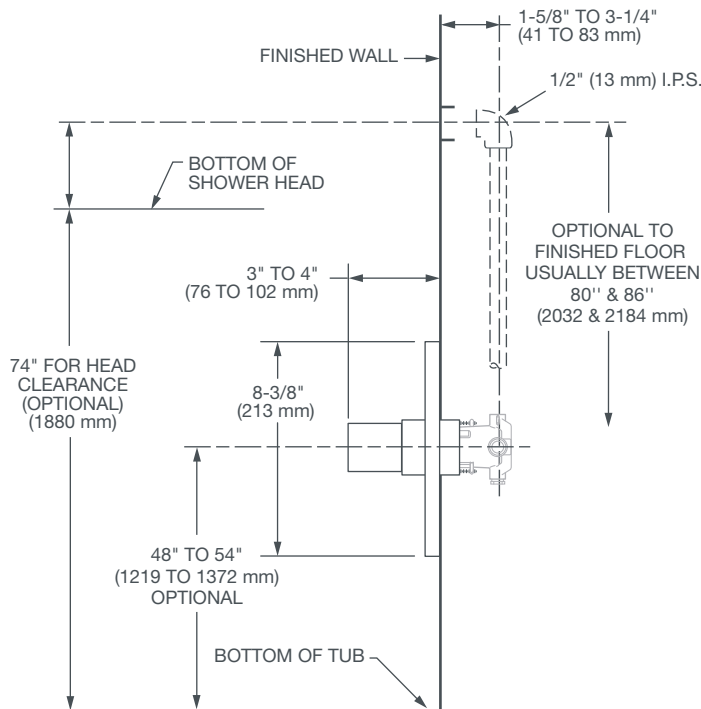

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**



Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.