

COSSU™

WALL-HUNG DUAL FLUSH TOILET



Grohe Actuator

D29001000.415

FEATURES

- Vitreous china
- Designed for small spaces
- Dual flush 1.6-0.8 gpf/6.0-3.0 Lpf
- EverClean® surface inhibits the growth of stain and odor causing bacteria, mold and mildew on the surface
- 2-1/4" fully-glazed trapway
- Includes design matched Polypropylene slow-close seat
- Mounting hardware included

DIMENSIONS

NOMINAL DIMENSIONS

14-3/8" x 21" x 15"-19" (365 x 533 x 381-483 mm)

COLORS/FINISHES

Canvas White (415)

WATER SPOT

4" (100 mm) wide

5" (125 mm) length

6-7/8" (175 mm) distance to rim

COMPONENTS

D23010S000.415 Wall-Hung Bowl

D29054026.000 Grohe In-Wall Carrier

5035A10G.415 Wall-Hung Toilet Seat

Elongated, Slow-Close, Top Mount

D28015000.XXX Skate Cosmopolitan Actuator for single, dual and start and stop functions

Polished Chrome (100), Brushed Nickel (144),

Polished Nickel (150)

COMPLIANCE CERTIFICATIONS

Meets or Exceeds ASME A112.19.2/CSA B45.


U.S. EPA WaterSense® Specification for HET's

ROUGH IN DIAGRAM SHOWN
ON NEXT PAGE

COSSU™

WALL-HUNG

DUAL FLUSH TOILET

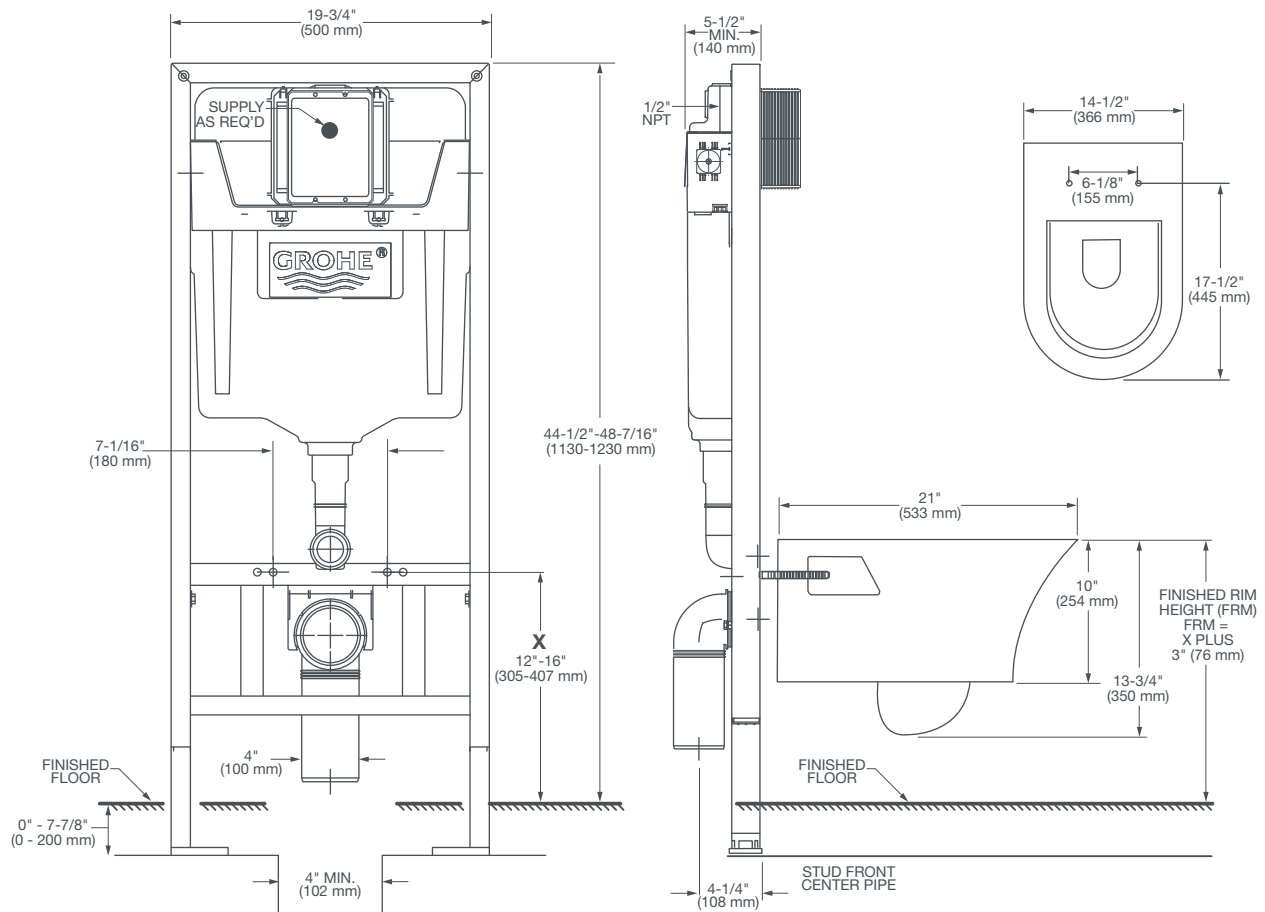

NOTES:

Supply not included with fixture and must be ordered separately.

Dimensions shown for location of supply is suggested.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.